


SYSTEM 9

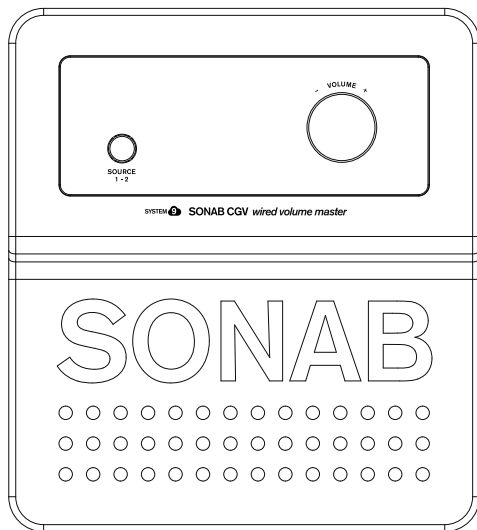

CGV wired volume master

User manual • Bruksanvisning • Manuel d'utilisation • Bedienungsanleitung • Manual del propietario

SPECIFICATIONS

Type: Wired volume controller

Inputs: 2

Outputs: 2

Dimensions:

Height: 150 mm

Width: 135 mm

Depth: 45 mm

FEATURES

Connect two sound sources

Control master volume in whole wired system

Easy wallmounting

Balanced dual outputs

Output for CVX external volume control



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



WARNING
Risk of electric shock
Do not open

AVIS
Risque de choc électrique
Ne pas ouvrir



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING:
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE.

CAUTION:
TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer’s instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
10. Only use attachments/accessories specified by the manufacturer.
11. Unplug this apparatus during lightning storms or when unused for long periods of time.
12. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

13. Damage Requiring Service

Unplug the apparatus from the wall outlet and refer servicing to qualified service personnel under three following conditions:

- A. When the power-supply cord or plug is damaged,
- B. If liquid has been spilled, or objects have fallen into the apparatus,
- C. If the apparatus has been exposed to rain or water,
- D. If the apparatus does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the apparatus to its normal operation,
- E. If the apparatus has been dropped or damaged in any way, and
- F. When the apparatus exhibits a distinct change in performance this indicates a need for service.

14. Object and Liquid Entry


Never push objects of any kind into the apparatus through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases shall be placed on the apparatus. Don’t put candles or other burning objects on top of this unit.

15. Batteries

Always consider the environmental issues and follow local regulations when disposing of batteries.

16. The power supply and power cord for this apparatus is intended for indoor use only.

ENGLISH


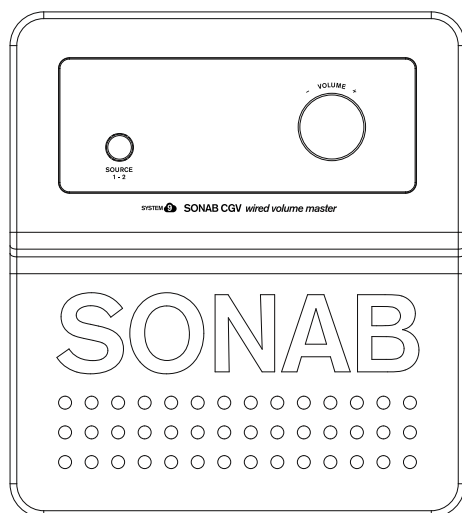


INSTALLATION

1. Place CGV for easy access.
2. Can be wallmounted.
3. Dual sound sources can be connected at the same time.
4. Use *only* balanced cables for audio signal to speakers.

WHEN INSTALLING, ALWAYS OBSERVE THE NATIONAL INSTALLATION AND ACCIDENT PREVENTION REGULATIONS.

OVERVIEW

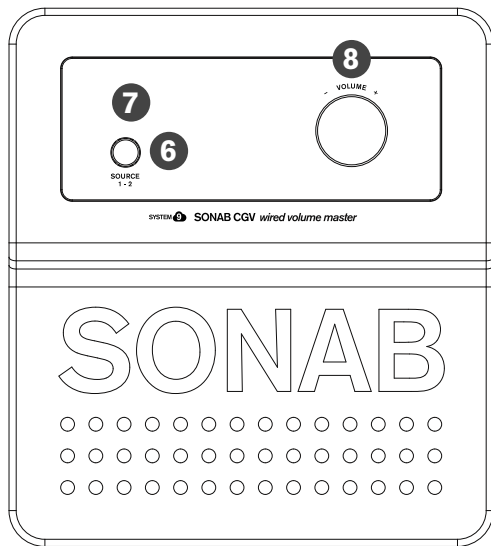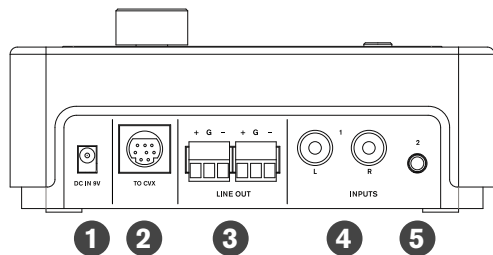

REAR

1. Power

Connect to external power supply. Included in the package.

2. Output to CVX external volume commander control

Connect to CVX external volume commander control (sold separately).

3. Outputs

Dual balanced outputs. Use just one, or both.

4. Input 1

RCA stereo input

5. Input 2

3.5 mm stereo input

TOP

6. Source button

Toggle between input 1 and 2.

7. LED source indicator

Red LED light for source input 1, Blue LED for source input 2.

8. Volume control

Use to control level in whole system, Master volume. Can be adjusted between 0–31.

Note: Volume can be set individually on each speaker, making it possible to create different volumes in different zones.